

Namor® 5

Product number: 5025038

Configuration: stainless steel, without laminar aerator, low pressure

Configuration options

5025009 | stainless steel, with laminar aerator, high pressure

5025010 | black matt, with laminar aerator, high pressure

5025038 | stainless steel, without laminar aerator, low pressure

5025039 | black matt, without laminar aerator, low pressure

✓ Sink faucet

✓ low pressure


✓ with swivelling outlet

Single lever mixer. With swivelling outlet, side lever and ceramic cartridge.

— swivel range 120°

— drill Ø 35 mm

— corresponds to the German and European drinking water regulation/directive

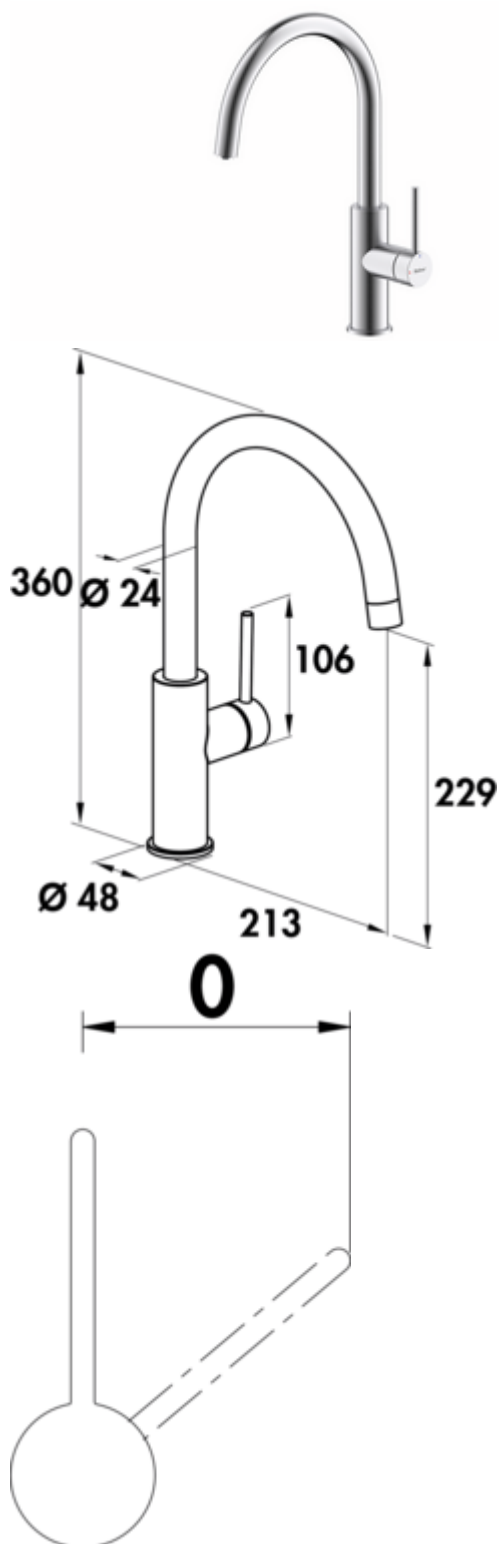

[more infos...](#)

Technical data

Article type	Sink faucet	Type of fitting	Single lever faucet
Number of handles	1	Operating pressure	low pressure
Total installation height	360 mm	Width	48 mm
Height	360 mm	Material	stainless steel
Outreach	213 mm	Swivel range handle	0 °
Outlet	with swivelling outlet	Cartridge size	25 mm
Discharge height	229 mm	ECO function	energy-saving cold start function
Operating mode	Lever	Max. Flow rate at 3 bar	12,5 l/min
Drilling diameter	35 mm	Flow rate at 3 bar (cold)	9,5 l/min
Handle position	side lever	Flow rate at 3 bar (hot)	9,5 l/min
Lever length	106 mm	Flow rate at 3 bar (mix)	12,5 l/min
Cartridge with ceramic sealing discs	Yes	Connection hoses	700 mm
Swivel range outlet	120°		

