


Lista 50 colour change LED

Product number: 7062344
Configuration: L 900 mm, 6.6 W, stainless steel coloured

Configuration options
7062340 | L 450 mm, 3.1 W, stainless steel coloured
7062341 | L 450 mm, 3.1 W, black matt
7062342 | L 600 mm, 4.3 W, stainless steel coloured
7062343 | L 600 mm, 4.3 W, black matt
7062344 | L 900 mm, 6.6 W, stainless steel coloured
7062345 | L 900 mm, 6.6 W, black matt
7062346 | L 1200 mm, 9 W, stainless steel coloured
7062347 | L 1200 mm, 9 W, black matt



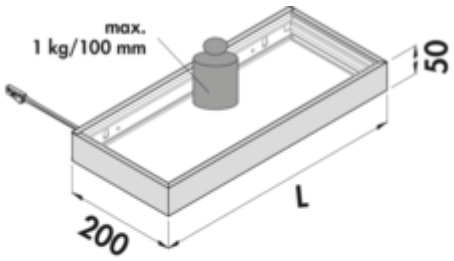

✓ lit glass pane
✓ 2700 K warm white to 6500 K cold white
✓ angular

Lit glass shelf. Aluminium body, mat safety glass, with LED lighting, uniform illumination over the entire width upward and downward, free-hanging attachment up to a shelf depth of 200 mm, screws on the back, mounted invisibly. **Converter not integrated in the lit glass shelf**.

Lit glass shelf
— 12 V, IP20
— continuous control of the light colour from **2700 K** warm white to **6500 K** cold white
— max. 64 lumen/watt at **6500 K** cold white
— 2000 mm supply line with mini-plug-in system
— **cable outlet rear left of lamp**
— bearing capacity* approx. 1 kg/100 mm
— incl. angle adjustment
— LIC 2.0/MEC LED system compatible
This product contains a light source of energy efficiency class G.

*The load-bearing capacity depends on the wall condition. Suitable mounting material for the respective wall type is to be used.

More information about the LIC/MEC LED system

more infos...

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Technical data

Article type	lit glass pane
Height	50 mm
Width	900 mm
Energy efficiency class	G
Transformer / converter required	Yes, must be ordered separately
Protection class	IP20
Protection class	III
Mounting/Fixing	Wall mounting screwable Screw fastening
Note	* The load-bearing capacity depends on the wall condition. Suitable mounting material for the respective wall type is to be used (not included in scope of delivery).
Material housing	aluminium
Shape	angular
Length of the supply line (primary)	2.000 mm
Carrying capacity	approx. 1.0 kg/100 mm
Illuminant included	Yes

Housing colour	stainless-steel coloured
Colour temperature	2700 K warm white to 6500 K cold white
Colour temperature adjustable	stepless
LIC system compatible	Yes
Plug-in system	with mini plug-in system
Illuminant type	LED
Replaceable illuminant	No
Light yield	max. 64 lumen/watt at 6500 K cold white
Connection	One-sided
Cover colour	transparent
Homogeneous light field without visible LED points	Yes
Design	lit glass pane
Illuminant power	6.6 watts

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com