


MTS profile

Product number: 1111160
 Configuration: zinc-coated

Configuration options
 1111160 | zinc-coated

- ✓ Connecting materials
- For suspension strips. To bypass lines: drill holes are placed outside the lines and the suspension strip is then fed through both profiles.
- suitable for all common suspension strips
 - lateral flexibility when mounting the MTS profiles, because the suspension strip is inserted or the profiles are pushed on
 - 15 x 260 x 15 mm (H x W x D)
 - load capacity up to max. 230 kg/profile
 - suitable fasteners need to be selected according to the wall type
 - use at least 2 screws per profile

The fitter is responsible for secure attachment!

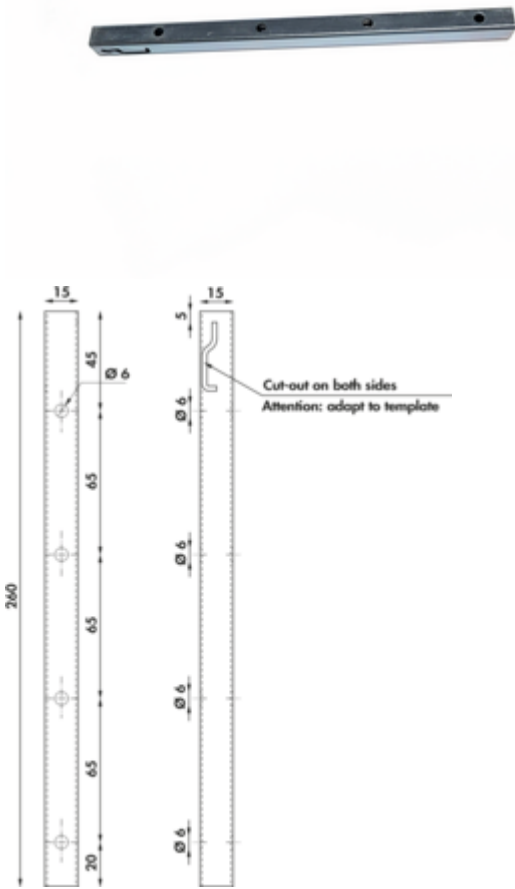

[more infos...](#)

Technical data

Article type	Connecting materials	Further	lateral flexibility when mounting the MTS profiles, because the suspension strip is inserted or the profiles are pushed on
Height	15 mm	Suitable for	suitable for all common suspension strips
Width	260 mm	Carrying capacity	max. 230 kg/profile
Note	To bypass lines: drill holes are placed outside the lines and the suspension strip is then fed through both profiles suitable fasteners need to be selected according to the wall type use at least 2 screws per profile. The fitter is responsible for secure attachment!	Consisting of	2 profiles

Recommendations

8031080	Suspension strip for kitchen cupboards, Connecting materials, L 2000 mm, galvanised
---------	---