

SERVIZIO Namor® 3

Product number: 5025016

Configuration: black matt, without laminar aerator, low pressure


Configuration options

5025005 | stainless steel, with laminar aerator, high pressure
 5025006 | black matt, with laminar aerator, high pressure
 5025015 | stainless steel, without laminar aerator, low pressure
 5025016 | black matt, without laminar aerator, low pressure
 5025044 | gunmetal, with laminar aerator, high pressure

- ✓ Sink faucet
- ✓ low pressure
- ✓ with swivelling outlet

Single lever faucet. With swivelling outlet, side lever and ceramic cartridge.

- swivel range 120°
- drill Ø 35 mm
- corresponds to the German and European drinking water regulation/directive

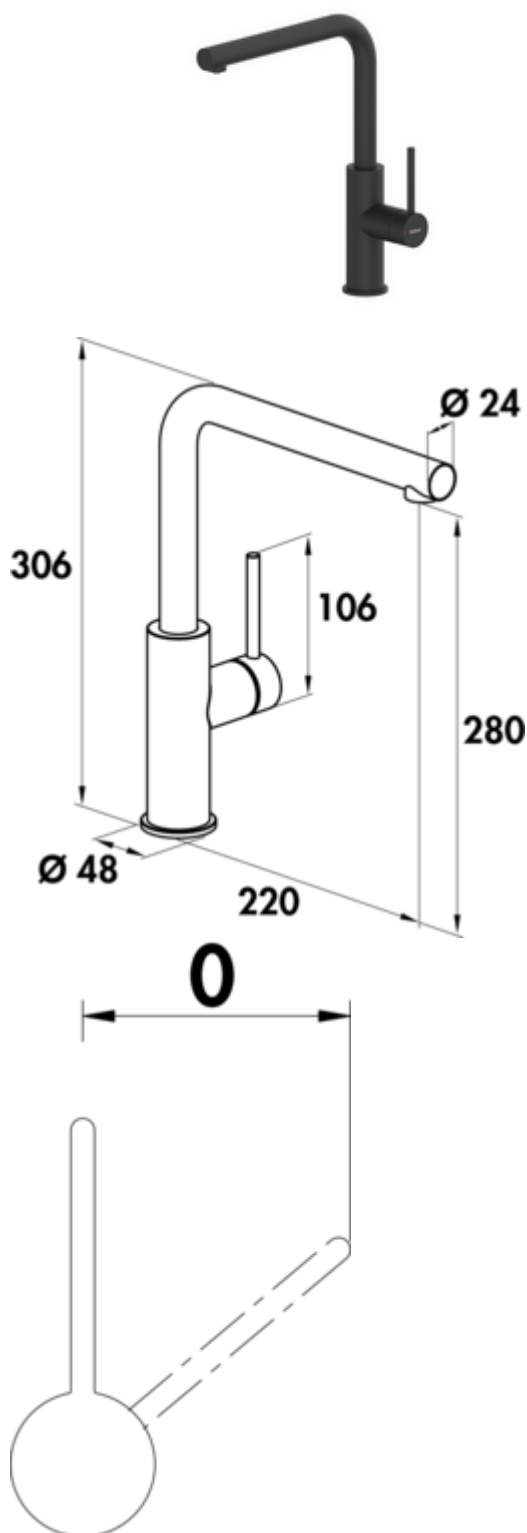

[more infos...](#)

Technical data

Article type	Sink faucet	Type of fitting	Single lever faucet
Brand	SERVIZIO	Operating pressure	low pressure
Number of handles	1	Width	48 mm
Total installation height	306 mm	Material	stainless steel
Height	306 mm	Surface/coating	powder coated
Outreach	220 mm	Swivel range handle	0 °
Outlet	with swivelling outlet	ECO function	energy-saving cold start function
Discharge height	280 mm	Max. Flow rate at 3 bar	12,5 l/min
Operating mode	Lever	Flow rate at 3 bar (cold)	9,5 l/min
Drilling diameter	35 mm	Flow rate at 3 bar (hot)	9,5 l/min
Handle position	side lever	Flow rate at 3 bar (mix)	12,5 l/min
Lever length	106 mm	Size laminar flow regulator	M18,5x1
Cartridge with ceramic sealing discs	Yes	Connection hoses	700 mm
Swivel range outlet	120°		

Technical drawing of a 90-degree elbow fitting. The drawing includes a side view showing a horizontal pipe with a vertical branch, a top view showing the 90-degree bend with dimensions 306 (total width), 280 (inner radius), and 220 (outer radius), and a perspective view. A detail view of the end shows a diameter of Ø24. The side view shows a flange with a diameter of Ø48. The perspective view shows the fitting with a 1/2 inch NPT connection.