

flow Star GTS 150 wall conduct

Product number: 4043040

Configuration: white, stainless steel

Configuration options

4043040 | white, stainless steel

- ✓ Wall sleeve
- ✓ installation in the wall

With connection to round pipe \varnothing 150 mm and round external stainless-steel cover.


— required opening pressure 150 Pa

— stainless steel cover \varnothing 220 mm

— hose/pipe connector \varnothing 150 mm, connector depth 24 mm

— installation depth 314–550 mm, can be shortened to 250 mm, wall penetration \varnothing about 155 mm

— for the installation of the mounting pipe, a core drilling hole (\varnothing 155 mm) is recommended

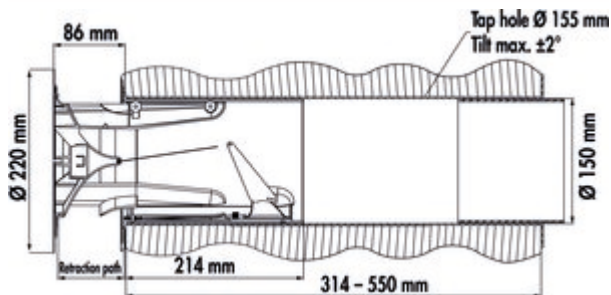

[more infos...](#)

Technical data

| | | | |
|-----------------|--|-----------------------|---|
| Article type | Wall sleeve | Support depth | 24 mm |
| Material | stainless steel | Diameter wall opening | 155 mm |
| Properties | can be shortened rust-free | Installation depth | 314–550 mm |
| Mounting/Fixing | installation in the wall | Wall box version | with connection to round pipe \varnothing 150 mm and round external stainless-steel cover |
| Certification | stainless | Pipe socket dimension | hose/pipe connector \varnothing 150 mm |
| Diameter | stainless steel cover \varnothing 220 mm | System dimension | 150 |
| Shortenability | can be shortened to 250 mm | Output drive | round |
| Shape | round | Ventilation system | COMPAIR flow 150 |
| Outer diameter | 150 mm | Opening pressure | 150 Pa |

