

flow Star GTS 150 wall conduct

Product number: 4043040

Configuration: white, stainless steel

Configuration options

4043040 | white, stainless steel

- ✓ Wall sleeve
- ✓ installation in the wall

With connection to round pipe Ø 150 mm and round **external stainless-steel cover**.


— required opening pressure 150 Pa

— stainless steel cover Ø 220 mm

— hose/pipe connector Ø 150 mm, connector depth 24 mm

— installation depth 314–550 mm, can be shortened to 250 mm, wall penetration Ø about 155 mm

— for the installation of the mounting pipe, a core drilling hole (Ø 155 mm) is recommended

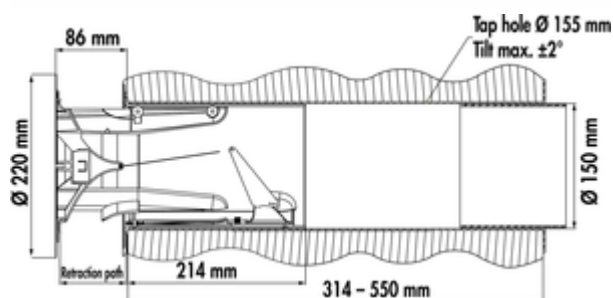

[more infos...](#)

Technical data

Article type	Wall sleeve	Support depth	24 mm
Material	stainless steel	Diameter wall opening	155 mm
Properties	can be shortened rust-free	Installation depth	314–550 mm
Mounting/Fixing	installation in the wall	Wall box version	with connection to round pipe Ø 150 mm and round external stainless-steel cover
Certification	stainless	Pipe socket dimension	hose/pipe connector Ø 150 mm
Diameter	stainless steel cover Ø 220 mm	System dimension	150
Shortenability	can be shortened to 250 mm	Output drive	round
Shape	round	Ventilation system	COMPAIR flow 150
Outer diameter	150 mm	Opening pressure	150 Pa

Dimensional sketch (PDF)

