

KWC Zoe 2

Product number: 5022197

Configuration: chrome, high pressure

Configuration options

5022197 | chrome, high pressure

5022198 | stainless steel finish, high pressure


5022252 | black matt, high pressure

5022253 | white matt, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ Swivelling

Single lever faucet. With swivelling/pull-out hose with shower head (can be switched to stream or shower) and ceramic cartridge.

- premium lifestyle faucet with pull-out spout
- adjustable shower head fitted seamlessly into the outlet
- Easy Lock – simple return of the pull-out shower head
- switch from a full jet to a fine spray with just one press of the selection switch on the shower head
- swivel range 120°
- drill Ø 35 mm

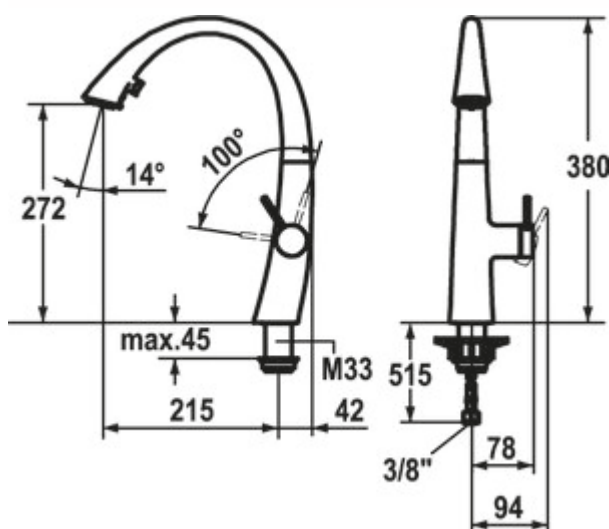

BELGAQUA




[more infos...](#)

Technical data

Article type	Sink faucet	Material	brass
Brand	KWC	Further	Easy Lock – simple return of the pull-out shower head premium lifestyle faucet with LED light ring integrated seemingly invisibly into the pull-out spout
Number of handles	1	Hose thread	3/8"
Total installation height	380 mm	Worktop thickness	45 mm
Outreach	215 mm	Swivel range handle	100 °
Outlet	Swivelling Extractable	TouchProtect	Yes
Discharge height	272 mm	Number of tap holes	1
Operating mode	Lever	Temperature limiter/scald protection	Yes
Drilling diameter	35 mm	Convertible jet/shower	Yes
Handle position	right	Moveable aerator	Yes
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Spring-guided hose shower	No
Cartridge with ceramic sealing discs	Yes	Minimum distance wall to centre tap hole	42 mm
Swivel range outlet	120°	Anti-limestone jet regulator	Yes
Beam type	fine spray	Angle of inclination of aerator	14 °
Factory customer service	Yes	Temperature adjustable	Yes
Type of fitting	Single lever faucet	Type of hose shower	Integrated hose spray
Operating pressure	high pressure		

Dimensional sketch (PDF)

KWC ZOE



KWC


PIA'13
DESIGN PLUS

KWC-Nr. _____ Oberfläche _____
10.201.102.000FL ganzchrom
 A 215, flexible Anschlusschläuche

Küche

Hebelmischer

- Positionierung des Hebels nur rechts möglich
 - Sicherheit für Kinder: Kaltwasser bei Hebelposition vorne
- Abstand Wand zu Mitte Tischbohrung min. 42 mm
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Ausziehbare Umstellbrause verdeckt
 - ergonomische Auszugrichtung, Form und Handhabung
 - SprayClean - aktive Kalkbeseitigung und schnelle Siebreinigung
 - Neoperl® Cascade®
 - PowerClean - Siebstrahlmodus, mit Rückstellautomatik
 - bis 500 mm ausziehbar
 - Schlauchoberfläche passend zu Armaturoberfläche
- SwivelStop - Schlauchdurchführung, schwenkbar 270°, begrenzbar auf 120°
- EasyLock - einfache Auszugbrausenrückführung
- OptimalSpace - grosszügiger Wasch- / Arbeitsbereich
- KWC Steuerpatrone S 25
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
- Flexible Anschlusschläuche 3/8"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung ø35 mm

Auslaufmenge Normalstrahl 8 l/min (3 bar)

Auslaufmenge Siebstrahl 9 l/min (3 bar)

Armaturengeräuschgruppe II

Sortiments-, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 08.09.2020