



Ideal Standard Cerafit 2

Product number: 5024155

Configuration: chrome, low pressure

Configuration options

5024154 | chrome, high pressure

5024155 | chrome, low pressure

✓ Sink faucet

✓ low pressure


✓ Swivelling

Single lever faucet. With swivelling pipe outlet and ceramic cartridge.

— swivel range 360°

— drill Ø 35 mm

German
Engineering

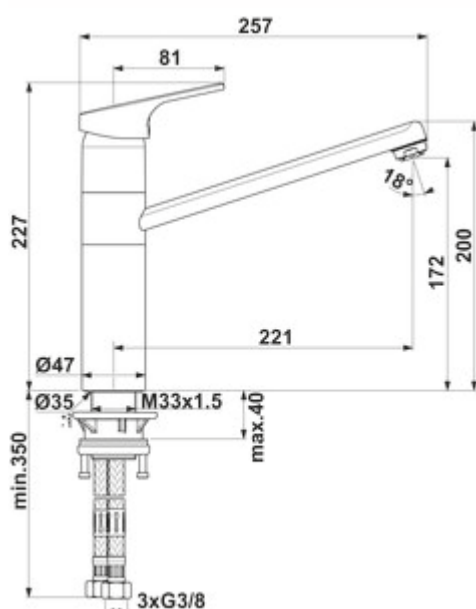

[more infos...](#)

Technical data

Article type	Sink faucet	Type of fitting	Single lever faucet
Brand	Ideal Standard	Operating pressure	low pressure
Number of handles	1	Width	47 mm
Total installation height	228 mm	Material	brass
Outreach	221 mm	Worktop thickness	40 mm
Outlet	Swivelling	Number of tap holes	1
Discharge height	174 mm	Cartridge size	38 mm
Operating mode	Lever	Temperature limiter/scald protection	Yes
Handle position	top	Outlet type	Tube
Lever length	81 mm	Spring-guided hose shower	No
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Internal thread	3/8"
Cartridge with ceramic sealing discs	Yes	Angle of inclination of aerator	18 °
Swivel range outlet	360°	Flow rate at 3 bar (cold)	6 l/min
Factory customer service	Yes		

Accessories

5031005	Dirt Filter Ecco 1, 3/8", chrome
---------	----------------------------------