



## Ideal Standard Cerafit 3

Product number: 5024155

Configuration: chrome, low pressure

### Configuration options

5024154 | chrome, high pressure

5024155 | chrome, low pressure


- ✓ Sink faucet
- ✓ low pressure
- ✓ with swivelling pipe outlet

Single lever faucet. With swivelling pipe outlet and ceramic cartridge.

— swivel range 360°

— drill Ø 35 mm

German  
Engineering

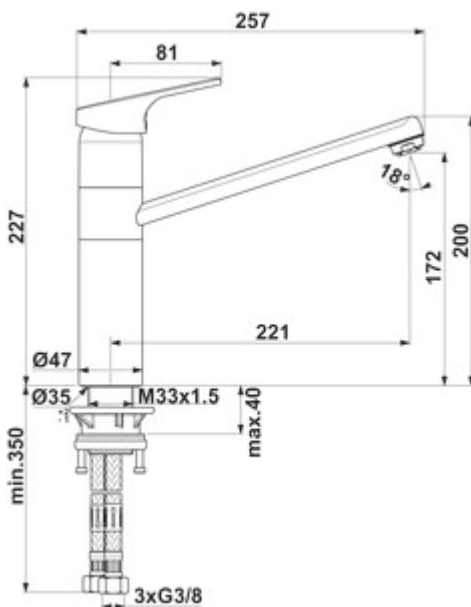

[more infos...](#)

### Technical data

Article type	Sink faucet	Swivel range outlet	360°
Brand	Ideal Standard	Type of fitting	Single lever faucet
Number of handles	1	Operating pressure	low pressure
Total installation height	228 mm	Width	47 mm
Height	228 mm	Material	brass
Outreach	221 mm	Worktop thickness	40 mm
Outlet	with swivelling pipe outlet	Number of tap holes	1
Discharge height	174 mm	Cartridge size	38 mm
Operating mode	Lever	Temperature limiter/scald protection	Yes
Handle position	top	Internal thread	3/8"
Lever length	81 mm	Angle of inclination of aerator	18 °
Cartridge with ceramic sealing discs	Yes	Flow rate at 3 bar (cold)	6 l/min

## Accessories

5031005	Dirt Filter Ecco 1, 3/8", chrome
---------	----------------------------------