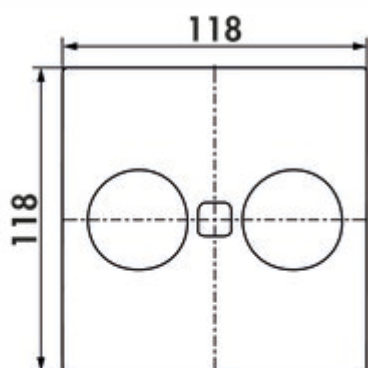


Duplex E double USB A+C

Product number: 7054004

Configuration: square, with earthed plug socket, stainless steel

Configuration options

- 7054002 | round, with earthed plug socket, stainless steel
- 7054004 | square, with earthed plug socket, stainless steel
- 7054006 | square, with earthed plug socket, black matt
- 7054007 | round, with earthed plug socket, black matt

- ✓ Built-in socket element
- ✓ 1 x earthed plug socket
- ✓ square

Socket element. Single and double USB A+C charger (charging station). Electric opening at the push of a button.

- 1 x USB charger type A, 5 VDC, I_A/I_{out}: 1 x 2100 mA
- 1 x USB charger type C, 5 VDC, I_A/I_{out}: 1 x 3000 mA
- 3680 watt/16 A, 250 VAC, IP20
- H05VV-F 3G 1.5 mm²
- 3-pole with earthing contact
- 2000 mm mains connection line with earthed plug
- drill Ø 105 mm
- installation depth approx. 48 mm
- increased contact protection
- space-saving cable routing (downwards or side cable outlet)
- simple and quick installation
- retrofitting possible
- integrated water drain



[more infos...](#)

Technical data

Article type	Socket element	Colour bezel	Stainless steel
Drilling diameter	105 mm	Colour socket	black
Width	118 mm	Cover/blind type	Electric
Mains voltage	250 VAC	Integrated water drain	Yes
Protection class	IP20	Number of USB ports	2
Cable outlet	cable outlet on the side or bottom	USB type	USB-A USB-C
Max. connected load	3680 watt	Total charging current	3000 mA (USB-C)
Mounting/Fixing	on the worktop installation	Type of socket element	Built-in socket element
Note	can be retrofitted	Switch type	Touch switch
Further	3-pole with earthing contact	Conductor cross-section	1,5 mm ²
Certification	CE TÜV	Rated current	16 A
Shape	square	Wiring	3-wire with free ends bared
Length of the supply line (primary)	2.000 mm	Number of sockets (total)	1
Installation depth	48 mm	Opening mechanism	Push-to-open
Version sockets	1 x earthed plug socket	Touch protection ("child safety lock")	with increased contact protection
Mains plug loosely enclosed	Yes	USB version	1 x USB charger type A, 5 VDC, IA/ I out: 2100 mA 1 x USB charger type C, 5 VDC, IA/ I out: 1 x 3000 mA

Accessories


7053024	Hole saw, Ø 105 mm, for Twist and Duplex
---------	--

Installation dimensions (PDF)

DUPLEX-Q

1x CEE 7/3; 1x USB-Charger Type A; 1x USB-Charger Type C
 2,0m H05VV-F AEH / ferrules; Schutzkontaktstecker/ mounting plug

Naber®
 ...inspiriert!

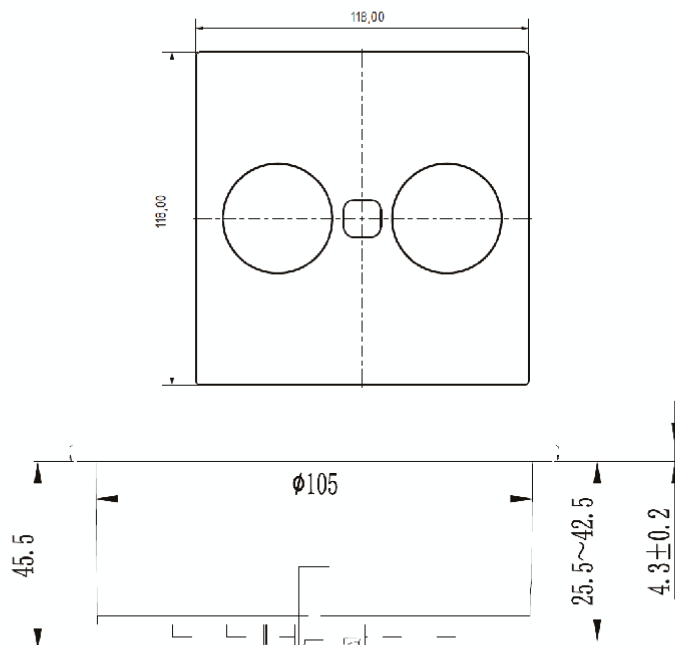

Technische Daten / technical data

Gehäuse / housing:	Kunststoff, schwarz / plastic in black color
Abdeckung / cover:	Edelstahl / stainless steel
Bohrdurchmesser / Drilling diameter:	105 mm
Einbautiefe / installation depth:	45,5 mm
Einbau / installation:	von oben montierbar / top mounting
CEE 7/3:	Steckereinführhilfe im Steckdosentopf / plug insert aid
USB-Charger Type A:	5,0 V 2,1 A
USB-Charger Type C:	5,0 V 3,0 A

Enschedestr. 24 - 48529 Nordhorn - Tel.: +49 5921 704-0 - Fax: +49 5921 704-140 - Internet: www.naber.com