


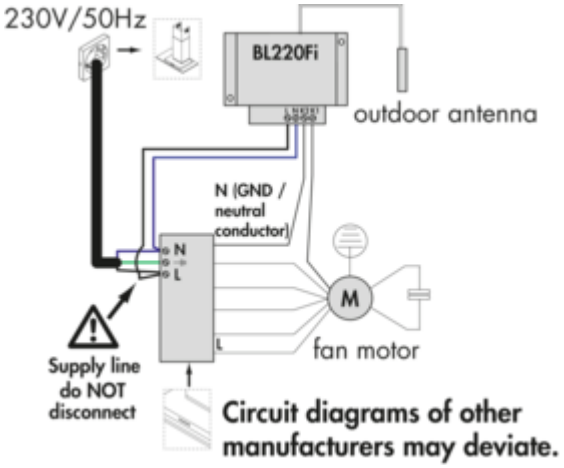

Window contact switch for hob extractors

Product number: 7051002
Configuration: with external antenna, white

Configuration options
7051002 | with external antenna, white

✓ Window contact switch
✓ installation in extractor hood (motor cable)

Safety switch with **wireless radio transmission via an external antenna** for use under difficult reception conditions, e.g. installation behind a stainless steel panel or a furniture carcase. The installation in the exhaust system is carried out via the connection to the fan motor cable (motor cable)

ATTENTION: for this it is necessary to intervene in the electrical system of the exhaust hood system!

Observe the guarantee/warranty conditions of the hood manufacturer.

Complete system with transmitter and receiver, including mounting material and batteries (long life, low energy consumption).

— switching capacity up to 1150 W (5 A)
— radio range monitoring
— battery monitoring
— relay contact 5 A N/O contact (potential-free)
— installation in extractor hood (motor cable)
— tested according to EU directives 2014/53/EU (RED), 2014/35/EU and 2014/30/EU
— When installed in a conventional extractor hood, the lighting can also be switched on when the fan motor is switched off.

Note for use in combination with BLDC motors:

Some extractor hoods, downdraft ventilators, and ventilation systems have what is known as a BLDC motor. This can be switched separately when using the third phase (phase one and two are used for the hob). A corresponding connection is often already provided for by the appliance industry – and can be used for the wireless radio switch.

For the classic single-phase alternating current motor, we recommend 7051001.

Please note the installation instructions on www.naber.com!

more infos...

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Technical data

Article type	Window contact switch
Power	switching capacity up to 1150 W (5 A)
Mounting/Fixing	installation in extractor hood (motor cable)
Note	The installation in the exhaust system is carried out via the connection to the fan motor cable (motor cable). ATTENTION: for this it is necessary to intervene in the electrical system of the exhaust hood system Observe the guarantee/warranty conditions of the hood manufacturer when installed in a conventional extractor hood, the lighting can also be switched on when the fan motor is switched off Note on use in combination with a BLDC motor: cooker hoods with a BLDC motor can be switched separately using the third phase Often, a connection is already provided and can be used for the window contact switch

Further	radio range monitoring battery monitoring relay contact 5 A N/O contact (potential-free)
Certification	TÜV
Consisting of	Complete system with transmitter and receiver, including mounting material and batteries (long life, low energy consumption)

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com