


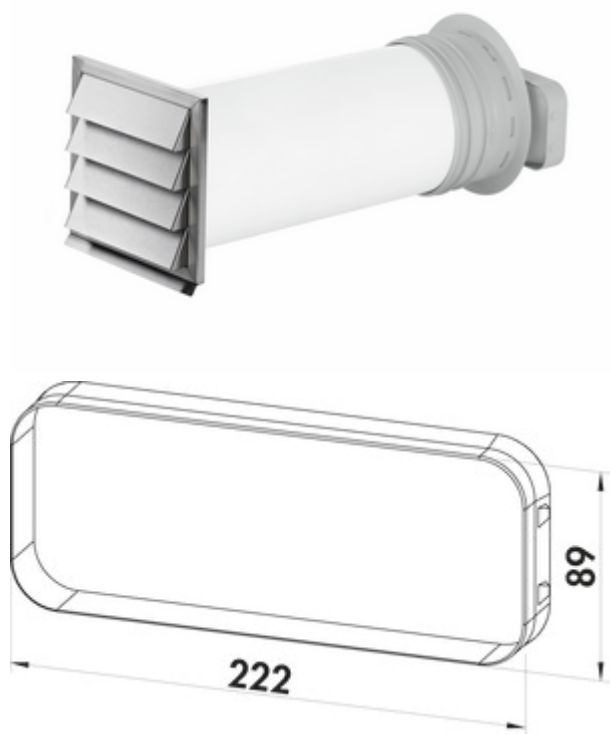

PRIME flow P-Klima-E flow 150 wall conduct

Product number: 4051079

Configuration: white, stainless steel

Configuration options

4051079 | white, stainless steel

- ✓ Wall sleeve
- ✓ plug-in system

Wall conduct, with backflow trap — N-Klick system for secure connection with the universal connector

- direct connection of the flat adapter, round pipe or round pipe bends
- max. wall thickness 550 mm, can be shortened to 220 mm
- core hole drilling in nominal Ø 162 or 164 mm
- wall sleeve for tool-free installation and sealing against leakage

[more infos...](#)

Technical data

Article type	Wall sleeve	Connection diameter	150 mm
Brand	PRIME flow	Suitable wall thickness	max. wall thickness 550 mm
Material	stainless steel/plastic	Blind version	with backpressure shutter
Mounting/Fixing	plug-in system	System dimension	150
Shortenability	can be shortened to 220 mm	Output drive	angular
Field of use & application	Outside	Ventilation system	COMPAIR PRIME flow®
Shape	angular		

Pos.	Anzahl	Artz.	Benennung	Artikel-Nr.	Werkstoff
1	1	E-Juß 150 Außenbohle	462042	Neborwunder Stahl (1.4301)	
2	1	Wendeflas	465 019	LD-PE	
3	1	Functor 150 L500	464009	PVC	
4	1	P-KLUS 150 Mauerbohrschablone	465 020	PP1020	

Kundenzeichnung

Technische Zeichnung

Material

Maßstab

Zeichnungsdatum

Zeichner

Gezeichnet

Prüfer

Freigegeben

405 079

Compair Prime flow

P-Klima E flow 150 Mauerkasten