


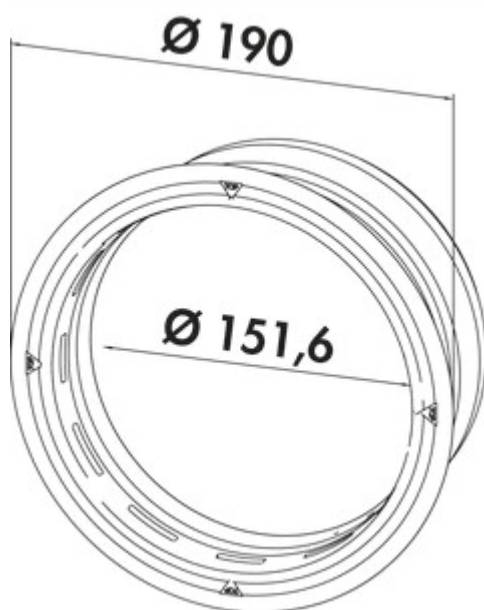

PRIME flow P-Turbo 150 wall conduct incl. THERMOBOX

Product number: 4051064

Configuration: white, stainless steel

Configuration options

4051064 | white, stainless steel

- ✓ Wall sleeve
- ✓ installation in the wall
- ✓ N-click system with integrated latching elements

Wall conduct, incl. THERMOBOX heat retention system and Turbo stainless steel external blind for installation close to the ground and for conventional installation at ceiling height.

Two-stage installation:

1. Assembly of the separately packaged construction kit
2. Toolless insertion of the heat retention system and the blind

- N-Klick system for secure connection with the universal connector
- direct connection of the flat adapter, round pipe or round pipe bends
- Blower-Door certified (necessary opening pressure >65 Pa)

Raw construction set:

- raw construction set for installation in the wall at any time
- max. wall thickness 550 mm, can be shortened to 220 mm
- core hole drilling in nominal Ø 162 or 164 mm
- hard foam plugs to protect against dirt during the construction phase
- wall sleeve for tool-free installation and sealing against leakage



[more infos...](#)

Technical data

Article type	Wall sleeve	Outer diameter	150 mm
Brand	PRIME flow	Suitable wall thickness	max. wall thickness 550 mm
Material	stainless steel/plastic	Wall box version	wall conduct, incl. THERMOBOX heat retention system and Turbo stainless steel external blind for installation close to the ground and for conventional installation at ceiling height
Properties	can be shortened	System dimension	150
Mounting/Fixing	installation in the wall N-click system with integrated latching elements	Output drive	round
Suitable for	direct connection of the flat adapter, round pipe or round pipe bends	Ventilation system	COMPAIR PRIME flow®
Shortenability	can be shortened to 220 mm	Opening pressure	> 65 Pa
Shape	round	Rohbauset	raw construction set for installation in the wall at any time max. wall thickness 550 mm, can be shortened to 220 mm core hole drilling in nominal Ø 162 mm wall sleeve for tool-free installation and sealing against leakage polystyrene plugs to protect against dirt during the construction phase
More parts	THERMOBOX		

Technical drawing of the Ncbor P-Turbo 150 Mauerk. inkl. Thermobox. The drawing includes a side view with dimensions (220-550 mm length, 190 mm diameter), a top view (A-A), and a perspective view. The side view shows a cylindrical unit with a flange at the bottom and a mounting bracket at the top. The top view shows a circular cross-section with a central opening. The perspective view shows the unit from an angle, highlighting the mounting bracket and the flange. The drawing is labeled with 'Ncbor' and 'P-Turbo 150 Mauerk. inkl. Thermobox'.