
Angola 40



Product number: 1106115
Configuration: granite concrete

Configuration options
1106111 | granite nero
1106112 | granite espresso
1106113 | granite metallico
1106114 | granite magnolia
1106115 | granite concrete
1106116 | granite lava
1106117 | granite nero assoluto

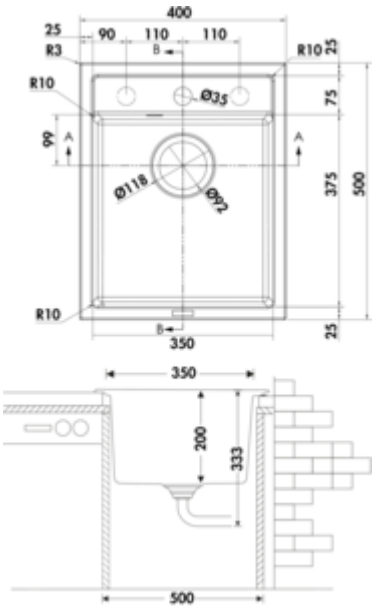

✓ Built-in sink
✓ Flush mounted sink
✓ Composite

Built-in sink. Composite, single bowl. 3½" basket strainer valve flush with rotational ex-center fitting, chrome-plated. 3 pre-drilled holes, **drill holes must be completed during assembly**.
Also suitable for flush installation.
— suitable for worktop thicknesses from 22 mm to 44 mm
— cut-out dimensions ca. 380 x 480 mm (built-in sink)
— can also be used in combination with hot water fittings (+/–100 °C)





more infos...

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Technical data

Article type	Sink
Height	329 mm
Width	400 mm
Material	Composite
Cabinet width	500 mm
Suitable for	can also be used in combination with hot water fittings (+/–100 °C)
Cut-out dimension	approx. 380 x 480 mm
Excenter fitting	Eccentric set, chrome-plated
Valve type	3½" basket strainer valve flush
Overflow	Overflow in the main basin
Installation variant	Built-in sink Flush mounted sink
Main sink width	350 mm

Height main sink	200 mm
Depth main sink	375 mm
Flushing radius (R)	3
Maximum worktop material thickness	44 mm
Material thickness worktop minimum	22 mm
Armature bench	Yes
Number of holes	3 pre-drilled holes drill holes must be completed during assembly
Note fitting bore	pre-drilled
Number of sinks	1 main sink
Number of overflow points	1
Garnish actuation	Chrome-plated rotary eccentric
Pelvic inner radius (R)	10

Spare Parts


1106066	Rotational excenter fitting, Drain fittings, 3½" basket strainer valve flush, for Angola 40

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

naber.com

Dimensional sketch (PDF)

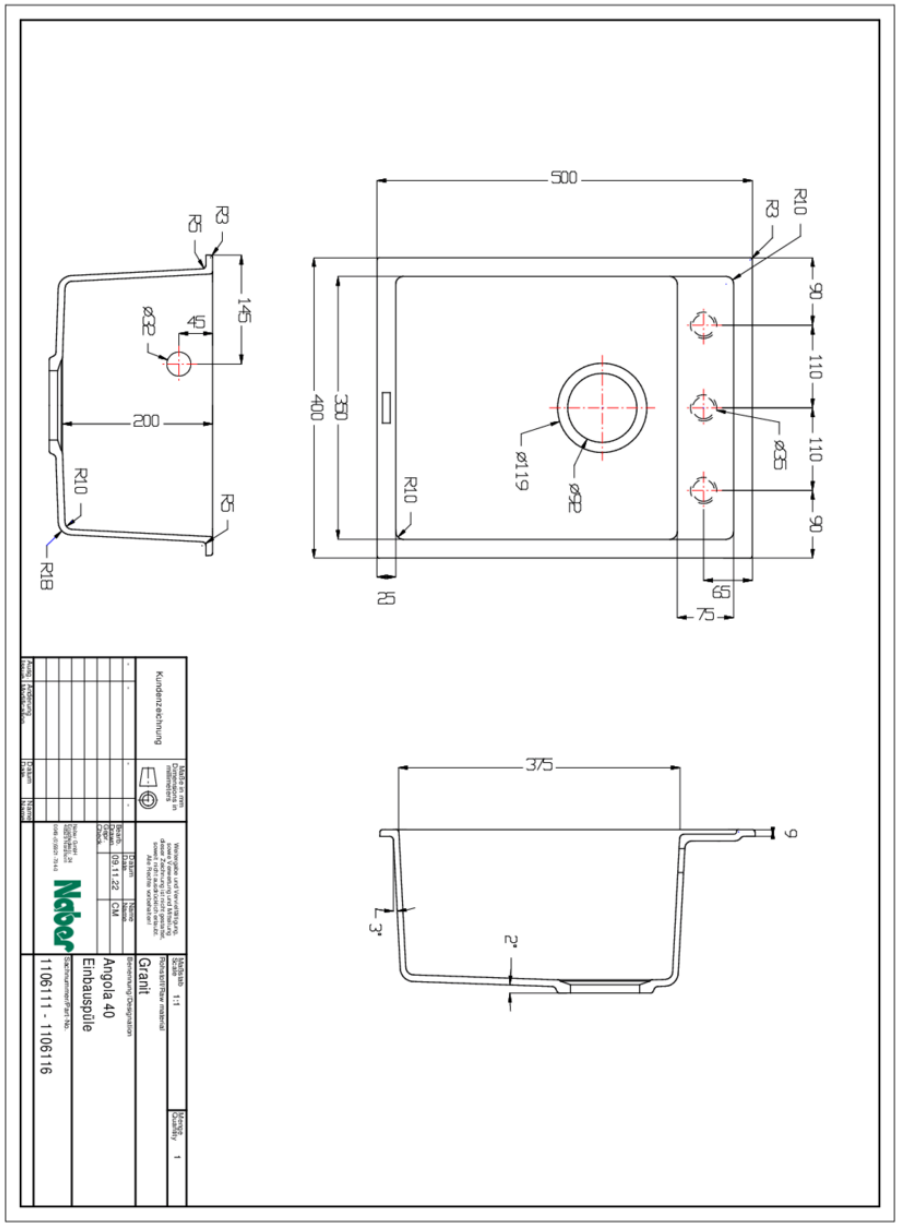

Installation dimensions (PDF)

