



KWC Ono Highflex 2

Product number: 5022103

Configuration: chrome, high pressure

Configuration options

5022103 | chrome, high pressure

5022104 | stainless steel, high pressure

✓ Sink faucet


✓ high pressure

✓ Swivelling

Single lever faucet. With swivelling outlet and spring-guided hose with shower head, side lever and ceramic cartridge.

— swivel range 360°

— drill Ø 35 mm

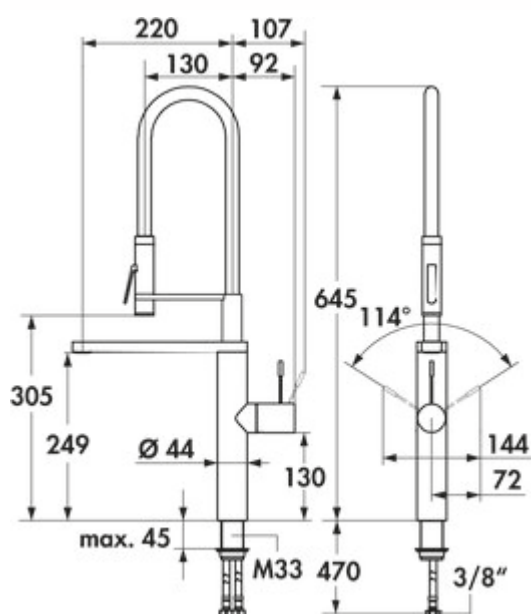

[more infos...](#)

Technical data


Article type	Sink faucet	Type of fitting	Single lever faucet
Brand	KWC	Operating pressure	high pressure
Number of handles	1	Width	44 mm
Total installation height	645 mm	Hose thread	3/8"
Outlet	Swivelling	Worktop thickness	45 mm
Discharge height	249 mm	Swivel range handle	114 °
Operating mode	Lever	TouchProtect	Yes
Drilling diameter	35 mm	Number of tap holes	1
Manufacturer's warranty	5 years manufacturer's warranty 10-year after-sales guarantee on spare parts	Temperature limiter/scald protection	Yes
Cartridge with ceramic sealing discs	Yes	Spring-guided hose shower	Yes
Swivel range outlet	360°	Minimum distance wall to centre tap hole	72 mm
Factory customer service	Yes	Anti-limestone jet regulator	Yes

Accessories

5031005	Dirt Filter Ecco 1, 3/8", chrome
---------	----------------------------------

Dimensional sketch (PDF)

KWC ONO



KWC-Nr.	Oberfläche
10.151.423.000FL	ganzchrom
A 220, flexible Anschlussschläuche	
10.151.423.700FL	edelstahl
A 220, flexible Anschlussschläuche	

KWC



DESIGN PLUS



Küche

highflex®
extended water system

EDELSTAHL
STAINLESS STEEL

Hebelmischer

- HighFlex patentierte Federschlauchtechnologie
- Positionierung des Hebels rechts oder links möglich
- Bedienungshebel aus Medizinalstahl
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Integrierte Unterdruckumstellung
- EasyLock - einfache Auszugbrausenrückführung
- Schwenkauslauf 360°
 - Neoperl® SLIM®
- Profibrause 360° drehbar
 - SprayClean - aktive Kalkbeseitigung und schnelle Siebreinigung
 - PowerClean - Siebstrahlmodus
- OptimalSpace - grosszügiger Wasch- / Arbeitsbereich
- KWC Steuerpatrone M 35 H
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
- Flexible Anschlussschläuche 3/8"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung ø35 mm
- Lieferumfang:
 - Brausenhalter Z.535.963

Auslaufmenge 11 l/min (3 bar)
 Brause: Auslaufmenge 3 l/min (3 bar)
 Armaturengeräuschgruppe I

Sortiments-, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 11.01.2021