



KWC Ono Highflex 2


Product number: 5022103
Configuration: chrome, high pressure

Configuration options
5022103 | chrome, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ with swivelling outlet

Single lever faucet. With swivelling outlet and **spring-guided** hose with shower head, side lever and ceramic cartridge.

- swivel range 360°
- drill Ø 35 mm

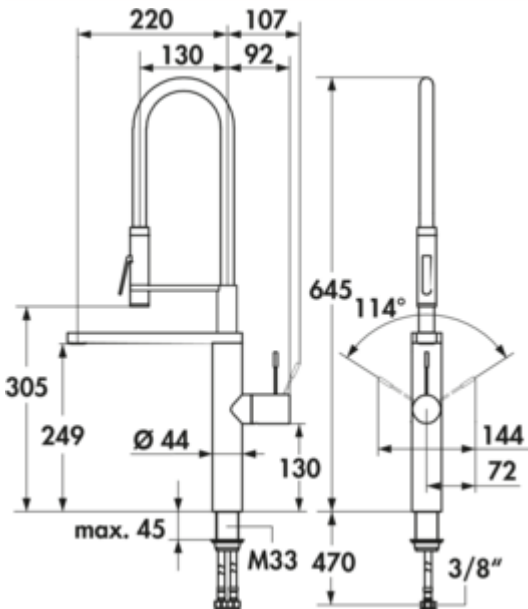


[more infos...](#)

Technical data

Article type	Sink faucet	Type of fitting	Single lever faucet
Brand	KWC	Operating pressure	high pressure
Number of handles	1	Width	44 mm
Total installation height	645 mm	Hose thread	3/8"
Height	645 mm	Worktop thickness	45 mm
Outlet	with swivelling outlet	Swivel range handle	114 °
Discharge height	249 mm	TouchProtect	Yes
Operating mode	Lever	Number of tap holes	1
Drilling diameter	35 mm	Temperature limiter/scald protection	Yes
Handle position	side lever	Minimum distance wall to centre tap hole	72 mm
Cartridge with ceramic sealing discs	Yes	Anti-limestone jet regulator	Yes
Swivel range outlet	360°	Type of hose shower	spring-guided hose with spray head

Dimensional sketch (PDF)

KWC ONO



KWC-Nr.	Oberfläche
10.151.423.000FL	ganzchrom
A 220, flexible Anschlussschläuche	
10.151.423.700FL	edelstahl
A 220, flexible Anschlussschläuche	

KWC


DESIGNPREIS
2009
NOMINEE

DESIGN PLUS


Innovationspreis
Architekten und Technik


Küche

highflex®
extended water system

EDELSTAHL
STAINLESS STEEL

Hebelmischer

- HighFlex patentierte Federschlauchtechnologie
- Positionierung des Hebels rechts oder links möglich
- Bedienungshebel aus Medizinalstahl
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Integrierte Unterdruckumstellung
- EasyLock - einfache Auszugbrausenrückführung
- Schwenkauslauf 360°
 - Neoperl® SLIM®
- Profibrause 360° drehbar
 - SprayClean - aktive Kalkbeseitigung und schnelle Siebreinigung
 - PowerClean - Siebstrahlmodus
- OptimalSpace - grosszügiger Wasch- / Arbeitsbereich
- KWC Steuerpatrone M 35 H
 - mit Keramikscheibentechnik
 - Auslaufmenge und Temperatur stufenlos einstellbar
- Flexible Anschlussschläuche 3/8"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung ø35 mm
- Lieferumfang:
 - Brausenhalter Z.535.963

Auslaufmenge 11 l/min (3 bar)
 Brause: Auslaufmenge 3 l/min (3 bar)
 Armaturengeräuschgruppe I

Sortiments-, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 11.01.2021