



## KWC Ono Highflex 2


Product number: 5022103  
Configuration: chrome, high pressure

**Configuration options**  
5022103 | chrome, high pressure

- ✓ Sink faucet
- ✓ high pressure
- ✓ with swivelling outlet

Single lever faucet. With swivelling outlet and **spring-guided** hose with shower head, side lever and ceramic cartridge.

- swivel range 360°
- drill Ø 35 mm

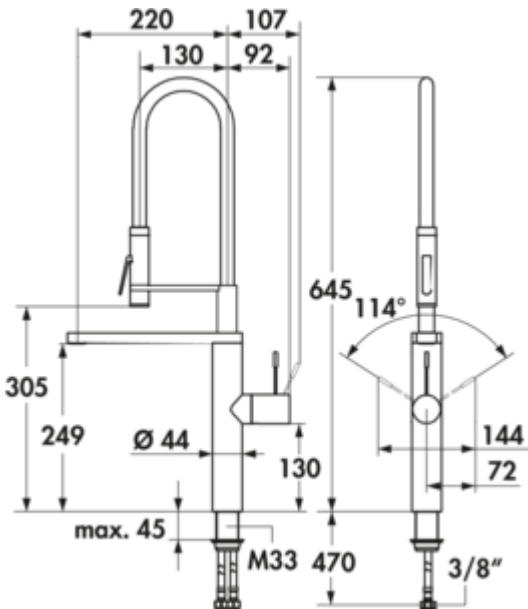


[more infos...](#)

### Technical data

|                                      |                        |                                          |                                    |
|--------------------------------------|------------------------|------------------------------------------|------------------------------------|
| Article type                         | Sink faucet            | Type of fitting                          | Single lever faucet                |
| Brand                                | KWC                    | Operating pressure                       | high pressure                      |
| Number of handles                    | 1                      | Width                                    | 44 mm                              |
| Total installation height            | 645 mm                 | Hose thread                              | 3/8"                               |
| Height                               | 645 mm                 | Worktop thickness                        | 45 mm                              |
| Outlet                               | with swivelling outlet | Swivel range handle                      | 114 °                              |
| Discharge height                     | 249 mm                 | TouchProtect                             | Yes                                |
| Operating mode                       | Lever                  | Number of tap holes                      | 1                                  |
| Drilling diameter                    | 35 mm                  | Temperature limiter/scald protection     | Yes                                |
| Handle position                      | side lever             | Minimum distance wall to centre tap hole | 72 mm                              |
| Cartridge with ceramic sealing discs | Yes                    | Anti-limestone jet regulator             | Yes                                |
| Swivel range outlet                  | 360°                   | Type of hose shower                      | spring-guided hose with spray head |

## Dimensional sketch (PDF)

## KWC ONO



| KWC-Nr.                            | Oberfläche |
|------------------------------------|------------|
| <b>10.151.423.000FL</b>            | ganzchrom  |
| A 220, flexible Anschlussschläuche |            |
| <b>10.151.423.700FL</b>            | edelstahl  |
| A 220, flexible Anschlussschläuche |            |

## KWC



DESIGN PLUS



## Küche

highflex®  
extended water system

**EDELSTAHL**  
STAINLESS STEEL

## Hebelmischer

- HighFlex patentierte Federschlauchtechnologie
- Positionierung des Hebels rechts oder links möglich
- Bedienungshebel aus Medizinalstahl
- TouchProtect - Schutz vor Verbrennungen durch Zweischalenprinzip
- Integrierte Unterdruckumstellung
- EasyLock - einfache Auszugbrausenrückführung
- Schwenkauslauf 360°
  - Neoperl® SLIM®
- Profibrause 360° drehbar
  - SprayClean - aktive Kalkbeseitigung und schnelle Siebreinigung
  - PowerClean - Siebstrahlmodus
- OptimalSpace - grosszügiger Wasch- / Arbeitsbereich
- KWC Steuerpatrone M 35 H
  - mit Keramikscheibentechnik
  - Auslaufmenge und Temperatur stufenlos einstellbar
- Flexible Anschlussschläuche 3/8"
- Befestigung mit Gewindestutzen M33 x 1.5
- Tischbohrung ø35 mm
- Lieferumfang:
  - Brausenhalter Z.535.963

Auslaufmenge 11 l/min (3 bar)  
 Brause: Auslaufmenge 3 l/min (3 bar)  
 Armaturengeräuschgruppe I

Sortiments-, Modell- und technische Änderungen vorbehalten. Massangaben in mm.

www.kwc.com 11.01.2021