



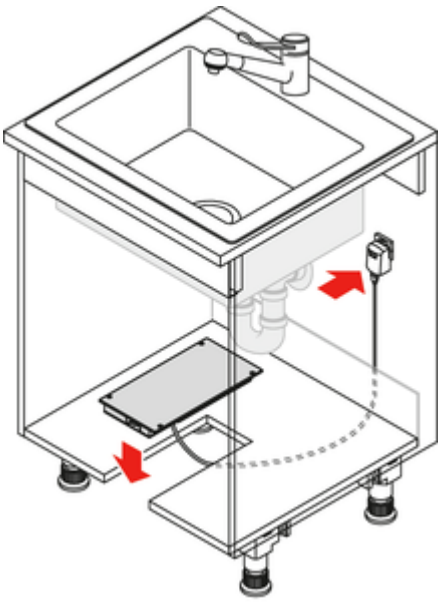

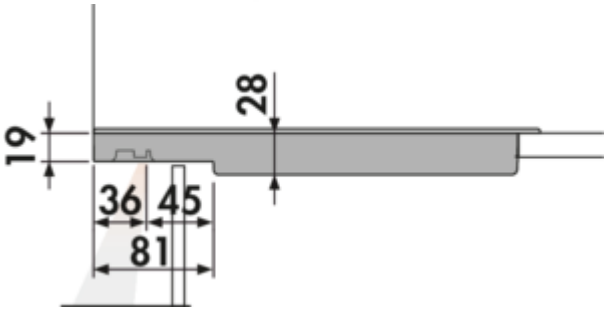


# LED foot kick Libero 3.0 with voice control

Product number: 8011212
Configuration: white

**Configuration options**
8011212 | white

✓ Accessory
✓ angular

Motor-controlled ejector for all pull-outs with front extension.
**Compatible with Alexa (Amazon) voice control systems.** Installation in the front area of the bottom of the cupboard.
Required base recess from cabinet edge: ca. 50 mm, **base height min. 100 mm**
Power supply: up to 230 volts, conventional sockets with 2000 mm cable USB-C/USB plug, drip-proof according to IP21.
— simple operation by foot sensor and/or voice control
— for base units from 300–1200 mm wide
— integrated LED indicator lighting, dimmable, can be switched off
— ejector strength adjustable, sensor sensitivity adjustable
— intelligent control, detects obstacles thanks to sliding clutch
— **product dimensions: 33 x 157 x 300 mm (H x W x D)**
— **cut-out dimensions: 127 x 286 mm (W x D)**

Setting and configuration via web browser.

**more infos...**

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

## Technical data

| | |
|---|---|
| Article type | Accessory |
| Height | 33 mm |
| Width | 157 mm |
| Protection class | IP21 |
| Smarthome | Amazon Alexa |
| Mounting/Fixing | cabinet bottom |
| Further | Required base recess from cabinet edge: ca. 50 mm<br>integrated LED indicator lighting, dimmable, can be switched off<br>ejector strength adjustable, sensor sensitivity adjustable<br>setting and configuration via web browser |
| Minimum plinth height | 100 mm |

| | |
|---|---|
| Cabinet width | for 300–1200 mm |
| Shape | angular |
| Length of the supply line (primary) | 2.000 mm |
| Opening technology | foot sensor and/or voice control |
| USB type | USB-C |
| Input voltage | 230 V |
| Design | Ejectors for front pull-outs |