


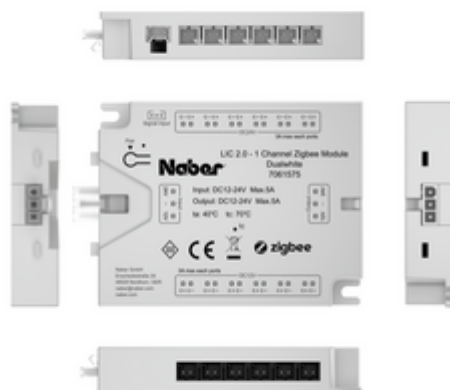

LIC 2.0 Driver LED 1-channel module radio/ZigBee

Product number: 7061575

Configuration: 12/24 V

Configuration options

7061575 | 12/24 V

✓ Accessory

With a ZigBee 1-channel function module, up to 12 lights can be connected to **one** channel and controlled via remote control, ZigBee-network or smart home (e.g. Alexa/Hue/Paulmann/Ikea).

When using the 1-channel module, **one** light group can be controlled separately.

Each 1-channel module can be individually assigned to the remote control.

The module can be used together with other function modules on one converter.

- white
- 1-channel, 12 LED outputs (6 x 12 V/6 x 24 V)
- max. 3 A per output, max. 5 A total
- control via remote control or smart home
- ZigBee Mesh even without a bridge (components connect to each other)
- simple teach-in
- it can be deployed only with colour change lights



[more infos...](#)

Technical data

Article type	Accessory	Width	70 mm
Height	16,5 mm		