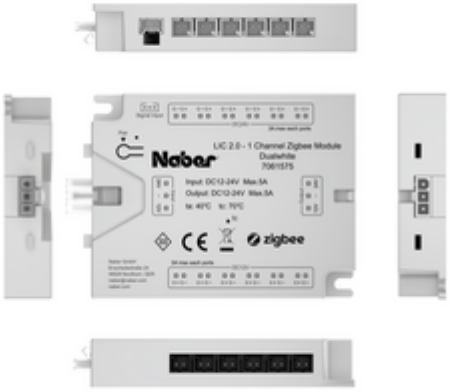


LIC 2.0 Driver LED 1-channel module radio/ ZigBee

Product number: 7061575
Configuration: 12/24 V

Configuration options
7061575 | 12/24 V

✓ Function module

With a ZigBee 1-channel function module, up to 12 lights can be connected to **one** channel and controlled via remote control, ZigBee-network or smart home (e.g. Alexa/ Hue/Paulmann/Ikea).
When using the 1-channel module, **one** light group can be controlled separately.
Each 1-channel module can be individually assigned to the remote control.
The module can be used together with other function modules on one converter.
— white
— 1-channel, 12 LED outputs (6 x 12 V/6 x 24 V)
— max. 3 A per output, max. 5 A total
— control via remote control or smart home
— ZigBee Mesh even without a bridge (components connect to each other)
— simple teach-in
— **it can be deployed only with colour change lights**

more infos...

Technical data

Article type	Function module	Width	70 mm
Height	16,5 mm		