


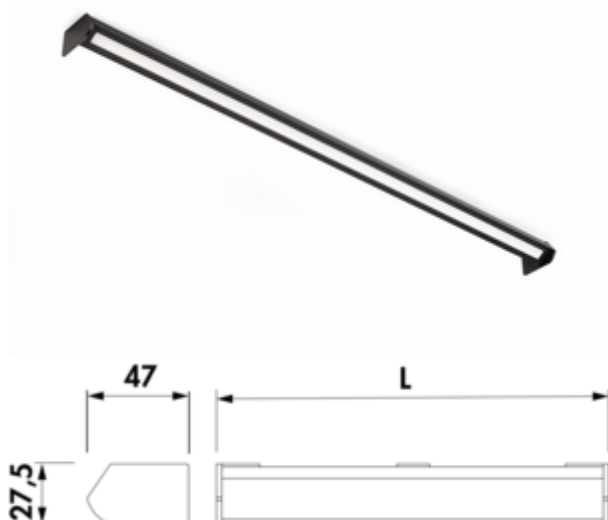

Velit colour change LED

Product number: 7063450

Configuration: L 600 mm, 5.9 W

Configuration options

7063429 | L 1000 mm, 9.7 W
 7063430 | L 1200 mm, 11.8 W
 7063431 | L 1500 mm, 14.7 W
 7063432 | L 1800 mm, 17.8 W
 7063450 | L 600 mm, 5.9 W
 7063451 | L 800 mm, 7.8 W
 7063452 | L 900 mm, 8.7 W

✓ Under-cabinet/niche light

✓ linear light

✓ 2700 K warm white to 6500 K cold white

Lamp mounted from below. Aluminium housing, with matt plastic cover including LED profile.

Individual lamp without switch

— 24 V

— continuous control of the light colour from **2700 K** warm white to **6500 K** cold white

— max. 110 lumen/watt at **6000 K** cold white

— connection to 24 V converter with colour change control

— 2000 mm supply line

— light chamber can be pivoted 35° on the horizontal axis

— LIC 2.0/MEC LED system compatible

This product contains a light source of energy efficiency class G.



[more infos...](#)

Technical data

Article type	Luminaire	Illuminant included	Yes
Height	27,5 mm	Housing colour	black matt
Width	600 mm	Colour temperature	2700 K warm white to 6500 K cold white
Energy efficiency class	G	Colour temperature adjustable	stepless
Transformer / converter required	Yes, must be ordered separately	Type of dimming	brightness continuously dimmable
Protection class	IP44	Illuminant type	LED
Protection class	III	Colour rendering index	81
Mounting/Fixing	Base unit installation (wall unit/shelf)	Replaceable illuminant	No
Certification	CE	Light yield	max. 110 lumen/watt at 6500 K cold white
Switch	No	Material cover	plastic
Shape	angular	Design	Under-cabinet/niche light linear light
Memory function	Yes	Dimming function (composite)	brightness continuously dimmable
Length of the supply line (primary)	2.000 mm	Illuminant power	5.9 watts