


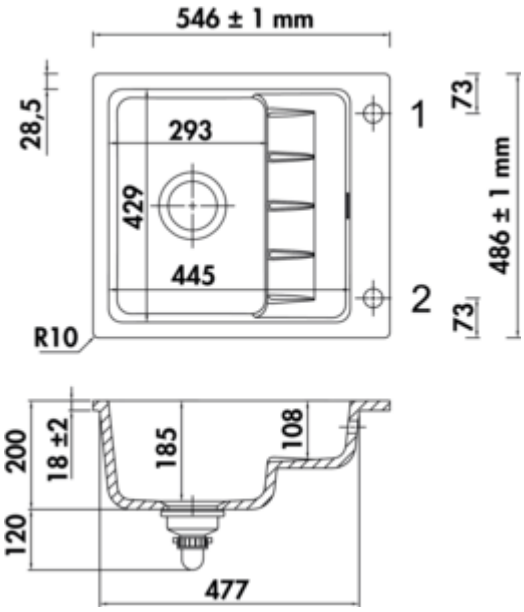

PickUP F

Product number: 1091014
Configuration: lava

Configuration options
1091011 | white glossy
1091012 | slate
1091013 | nero
1091014 | lava
1091015 | white matt

✓ Flush mounted sink
✓ Built-in sink
✓ ceramic

Built-in sink for flush mounting. Ceramic, single bowl with second level, reversible, 3½" basket strainer valve flush with premium rotational excenter fitting, chromed, drill hole 1 + 2 drilled through.
— requires beading all round or a support bar (beading depth 25 mm, beading width 8 mm)
— cutout dimensions approx. 550 x 490 mm, R 12 mm
— Sink with milled outer edge for flush mounting. Worktop thickness min. 30 mm. Attention: In the cutout, a chamfer of 2 mm x 45° has to be applied to the upper edge!

Design by Hans Winkler Design, Grafenau.



more infos...

Technical data

Article type	Sink
Height	320 mm
Width	546 mm
Material	ceramic
Designer	Design by Hans Winkler Design, Grafenau.
Note	requires beading all round or a support bar (beading depth 25 mm, beading width 8 mm) we recommend using a faucet with pull-out spout or shower head Sink with milled outer edge for flush mounting. Worktop thickness min. 30 mm. Attention: In the cutout, a chamfer of 2 mm x 45° has to be applied to the upper edge!
Cabinet width	600 mm
Cut-out dimension	approx. 550 x 490 mm, R 12 mm
Excenter fitting	Eccentric set, chrome-plated
Valve type	3½" basket strainer valve flush
Overflow	Overflow in the main basin
Installation variant	Flush mounted sink Built-in sink
Main sink width	293 mm

Height main sink	185 mm
Depth main sink	429 mm
Flushing radius (R)	10
Material thickness worktop minimum	30 mm
Number of tap holes	1
Armature bench	Yes
Number of holes	2
Arrangement sinks	Reversible
Number of sinks	1 main sink
Number of overflow points	1
Draining board	With integrated drainer
Garnish actuation	Chrome-plated rotary eccentric


Recommendations

1091027	Premium rotational excenter, Accessory, nero
1091036	Premium rotational excenter, Accessory, chrome
1091037	Premium rotational excenter, Accessory, stainless steel

Naber GmbH
Enschedestr. 24
DE-48529 Nordhorn

Tel. +49 5921 704-0
Fax +49 5921 704-140
naber@naber.com

Dimensional sketch (PDF)

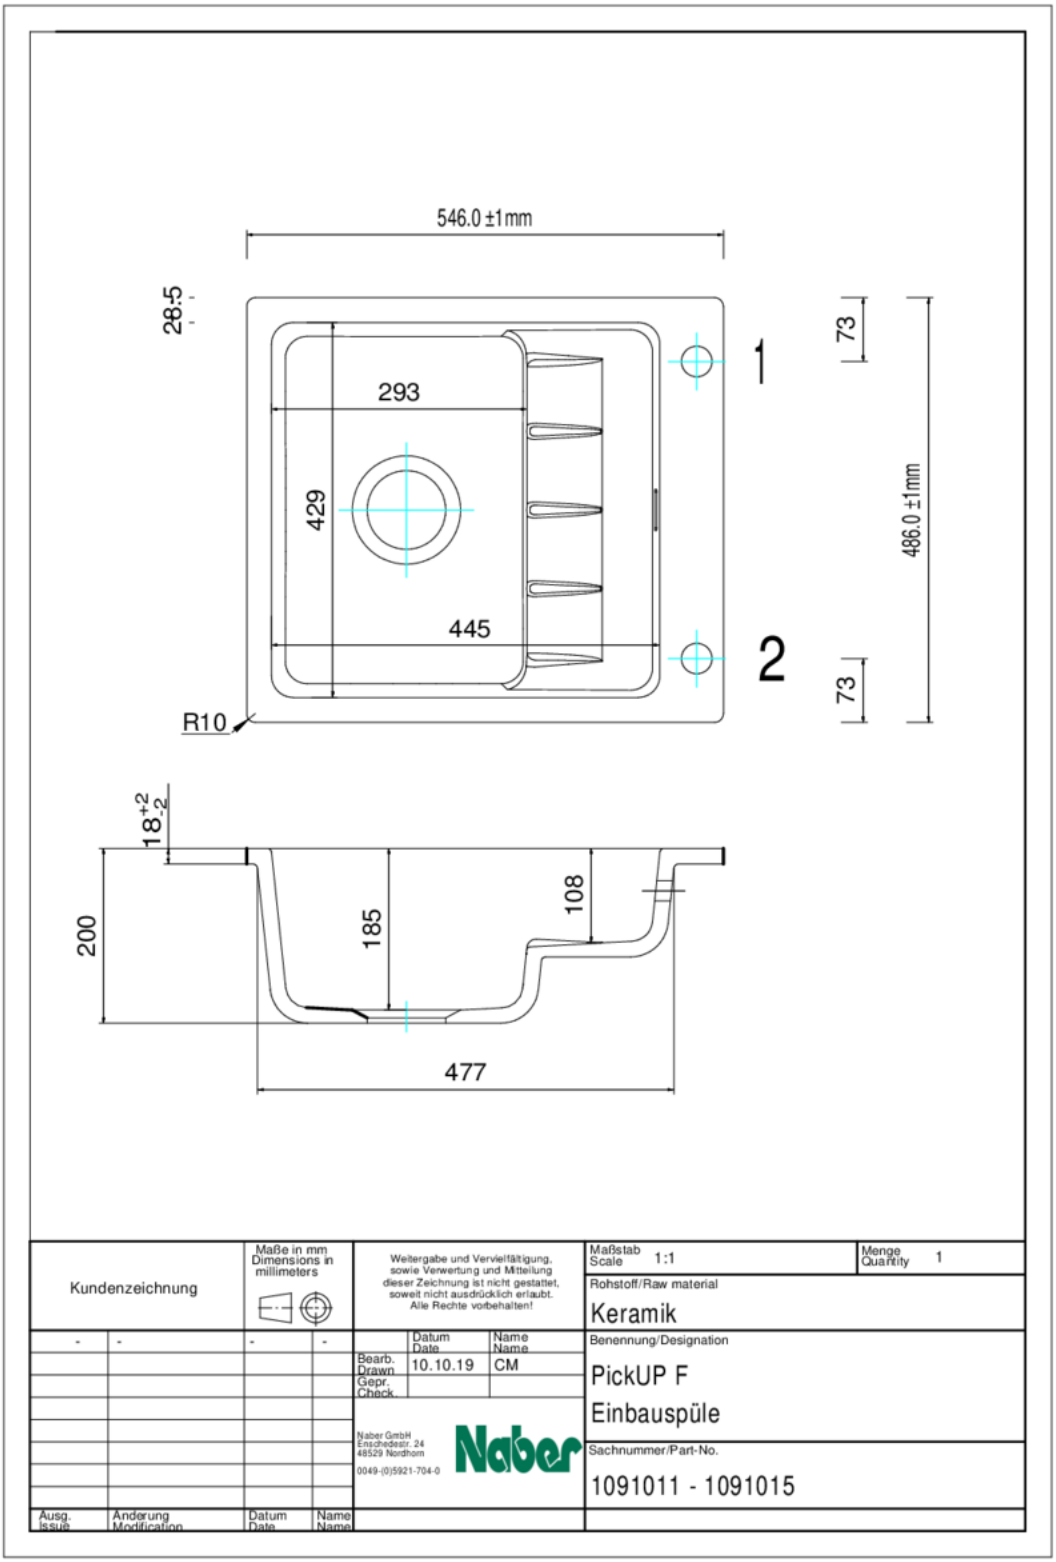

Installation dimensions (PDF)

